

1 Description

The CN8001 is an H-bridge motor driver used for driving reversible motors, which can drive one DC motor, one winding of a stepper motor, or other loads.

The CN8001 operates on a motor power supply voltage from 2.7V to 6V.

The CN8001 is controlled by two input pins. The two on/off inputs determine the output mode: forward, reverse, coast, or brake. Very low standby circuit current can be achieved when the two inputs are both at a low level.

The CN8001 is available with DFN2x2-8, SOT23-6, SOP-8 or ESOP-8 package.


2 Features

- Wide Power Range: 2.7V to 6V
- Low MOSFET On Resistance: $R_{DS(on)}=0.3\Omega$, $R_{DS(on)}=0.15\Omega$
- Forward, Reverse, Coast, or Brake Output Modes
- Suitable for wide range MCU control logic
- Input logic hysteresis
- Thermal Shutdown

3 Applications

- Smart BreakerSmart Lock
- Smart Water/Gas Meter
- Toys

4 Pinout

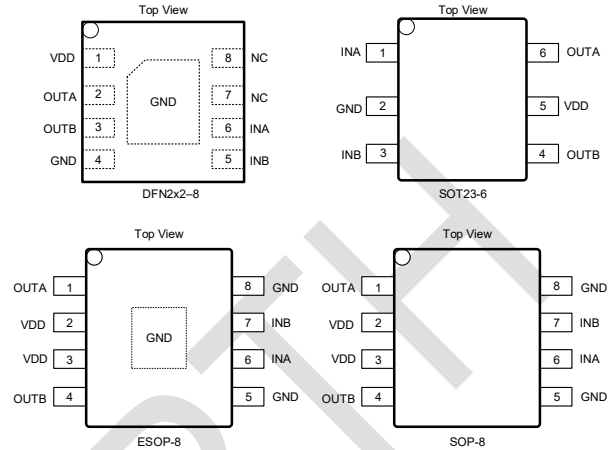

5 Ordering information

Product Number	Package	Quantity/Tape
CN8001DHR	DFN2X2-8	4000/Tape
CN8001TSR	SOT23-6	3000/Tape
CN8001SHR	SOP-8	4000/Tape
CN8001EHR	ESOP-8	4000/Tape


6 Marking

Product Number	Marking
CN8001DHR	CN8001 YYWW
CN8001TSR	01YW
CN8001SHR	CN8001 YYWW
CN8001EHR	CN8001 YYWW


Note: YY=Year WW=Week.

Green (RoHS & HF): CHIPNORTH defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your CHIPNORTH representative directly.
Moisture sensitivity level(MSL):3


7 Typical Application

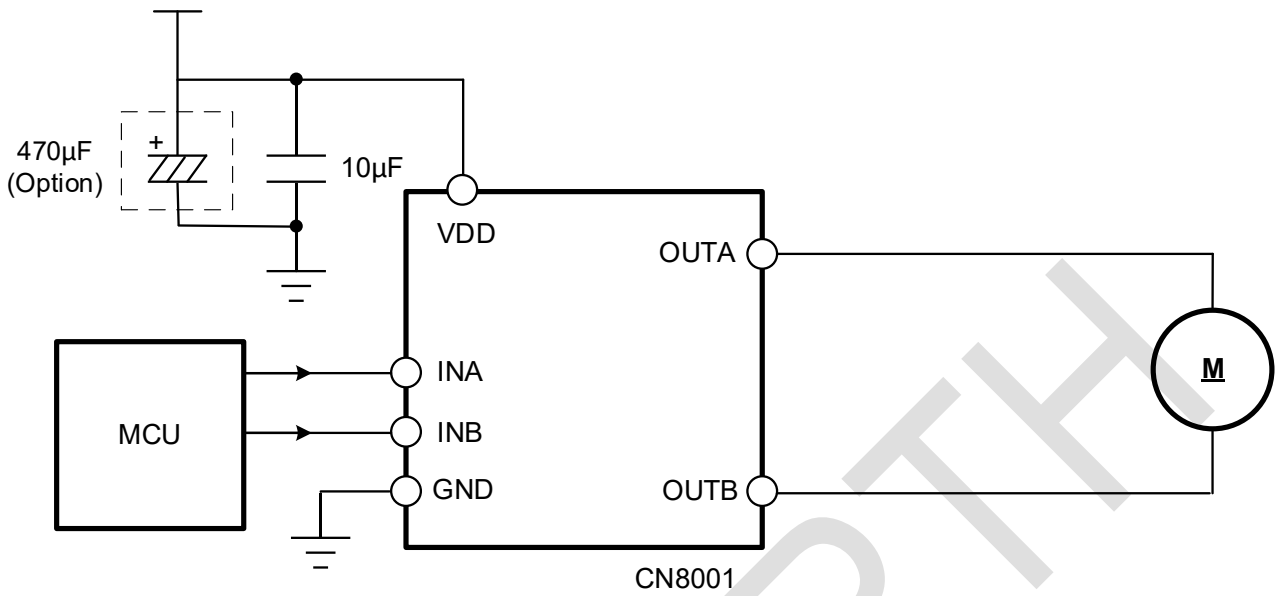

Please make sure that the input pins INA and INB remain low during power-up and power-down.

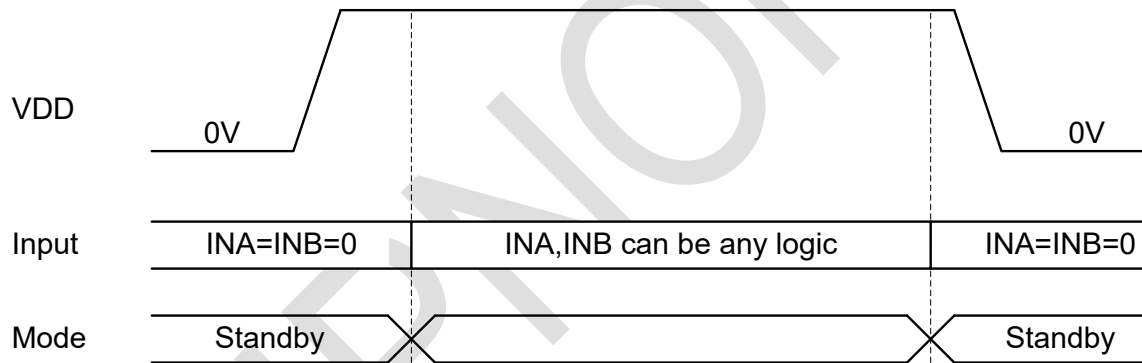

8 Block Diagram

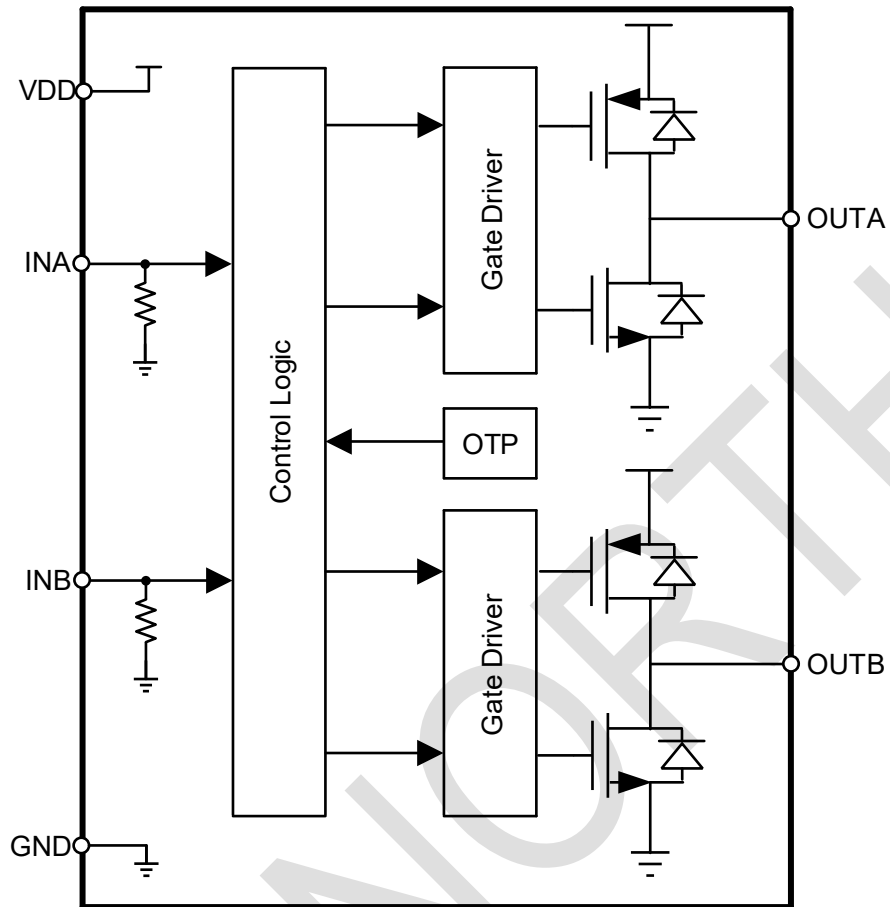

9 Pin Descriptions

Pin No.					Descriptions
Pin Name	CN8001 DHR	CN8001 TSR	CN8001 SHR	CN8001 EHR	
VDD	1	5	2、3	2、3	High Voltage Supply voltage. A decap capacitor is required to prevent large voltage spikes.
GND	4、9	2	5、8、9	5、8、9	Thermal PAD is also GND.
OUTA	2	6	1	1	Output, Connect this pin to the motor winding.
OUTB	3	4	4	4	
INA	6	1	6	6	Logic input, with a large internal pull-down resistor.
INB	5	3	7	7	Logic input, with a large internal pull-down resistor.
NC	7、8				

10 Specifications

10.1 Absolute Maximum Ratings

Parameter	Symbol	Value	Units
VDD Supply Voltage Range	V_{DD}	-0.4 ~ +7	V
Output Pins Voltage Range	V_{OUTx}	V_{IN}	V
Input Pins Voltage Range	V_{INx}	GND-0.4 ~ +7	V
Storage Temperature Range	T_{STG}	-55~150	°C
Soldering temperature	T_{LEAD}	260 (Soldering 10s)	°C

10.2 ESD Ratings

Discharge mode	Value	Units
HBM	±4000	V

10.3 Recommended Operating Range

Parameter	Symbol	Min.	Max.	Units
VDD Supply Voltage Range	V_{DD}	2.7	6	V
Logic Level Input Voltage	V_{INx}	2.3	6	V
Operating ambient temperature	T_A^*	-40	105	°C


10.4 Thermal Information

Parameter	Package	Value	Unit
θ_{JA}	DFN2x2-8	140	°C /W
	SOT23-6	180	°C /W
	SOP-8	160	°C /W
	ESOP-8	80	°C /W

10.5 Electrical Characteristics


Test conditions: TA=25°C, VDD=6V, unless otherwise specified.


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating supply voltage	VDD		2.7		6	V
Operating supply current	Iq0	INA=INB=0V		0.1	1	μA
Operating supply current	Iq1	At least one input =3.3V		40	65	μA
Input high voltage	VIH		2.3			V
Input low voltage	VIL				0.3	V
INx Input current	I_INx	VIN=3.3V		2.5		μA
Input pull-down resistance	RIN			1.2		MΩ
HS switch on resistance	Rhs	ILOAD=100mA		0.30	0.50	Ω
LS switch on resistance	Rls	ILOAD=100mA		0.15	0.25	Ω
Output enable time	T1			150		ns
Output disable time	T2			350		ns
Delay time	T3	INB high to OUTA low		150		ns
	T4	INA low to OUTB high		350		ns
Dead time				100		ns
Thermal shutdown threshold	OTP			155		°C
Thermal shutdown hysteresis				25		°C

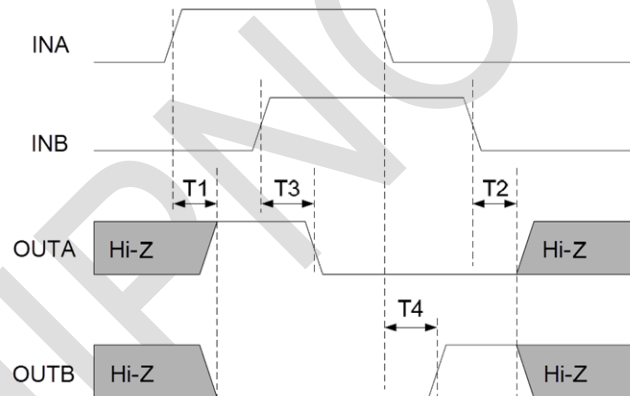


10.6 Characteristics Curve

Test conditions: VDD=6V, TA=25°C, Iload=0mA, unless otherwise noted.

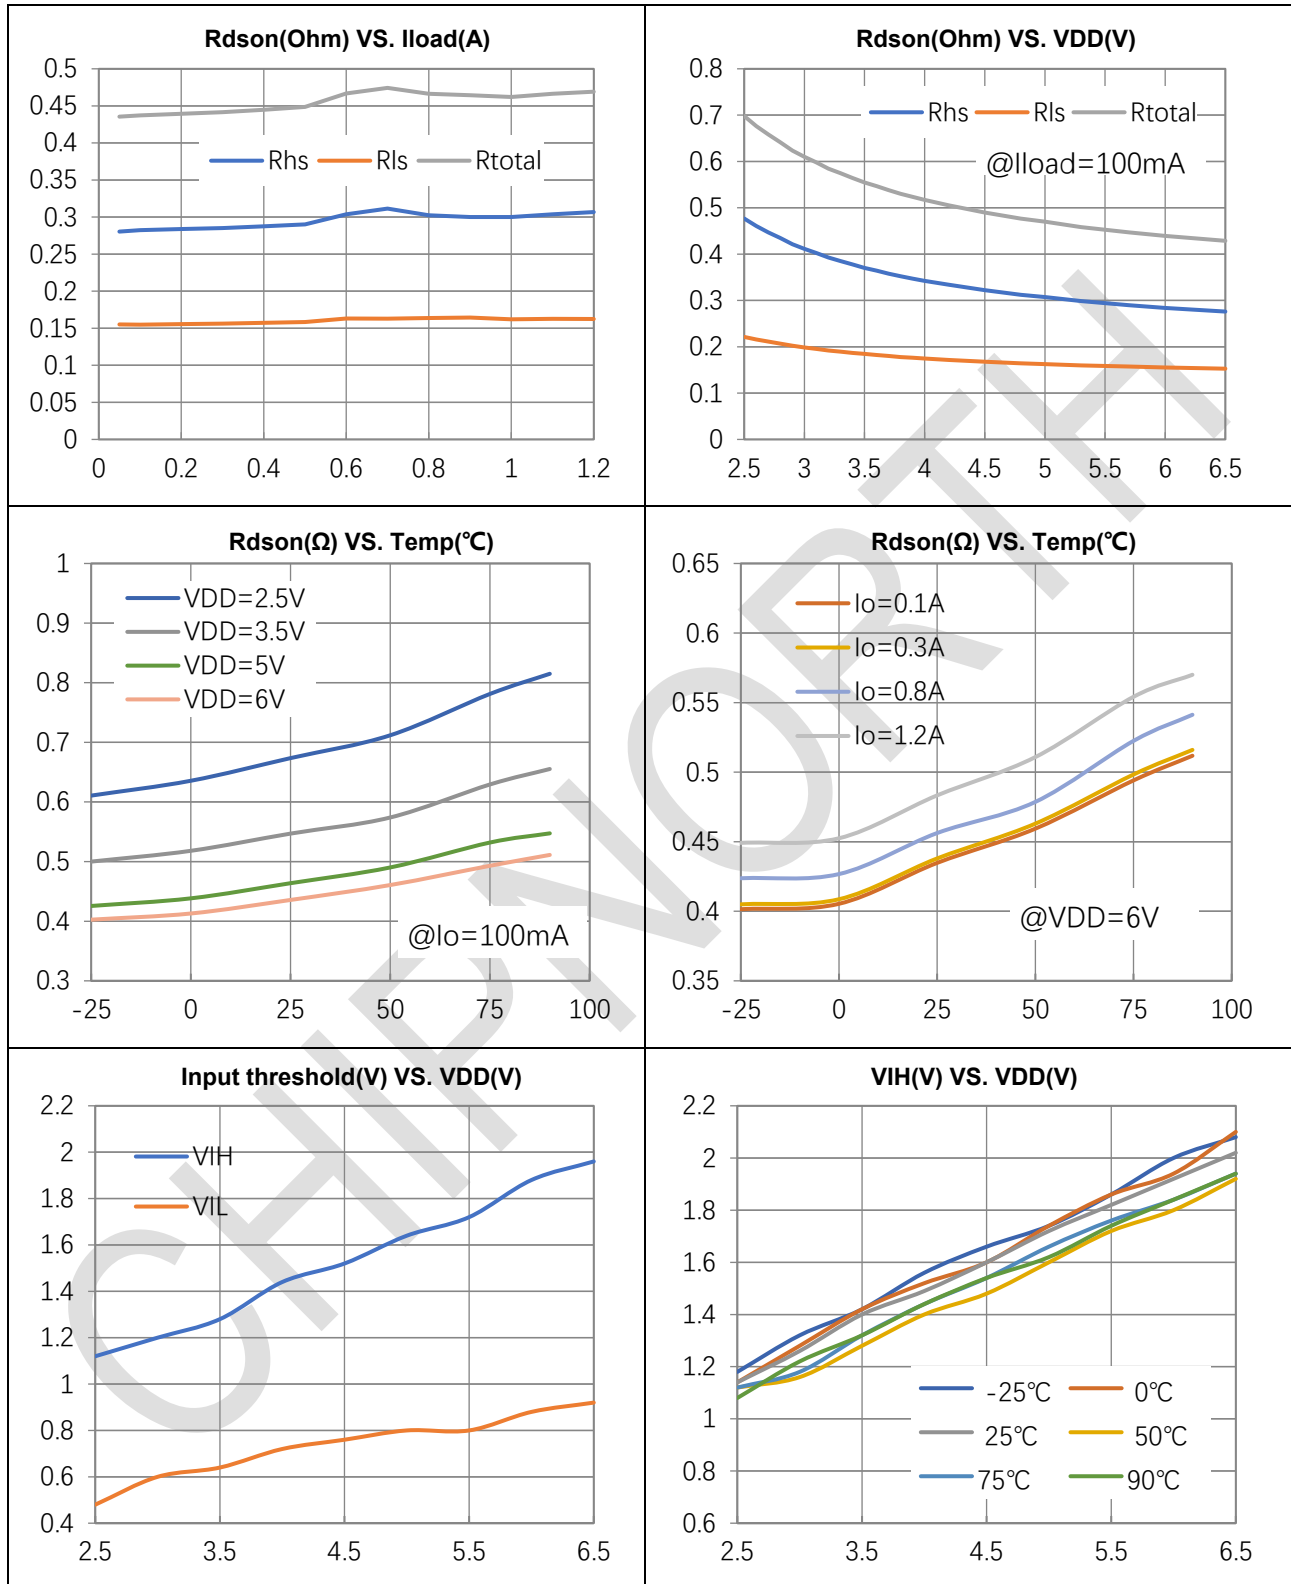

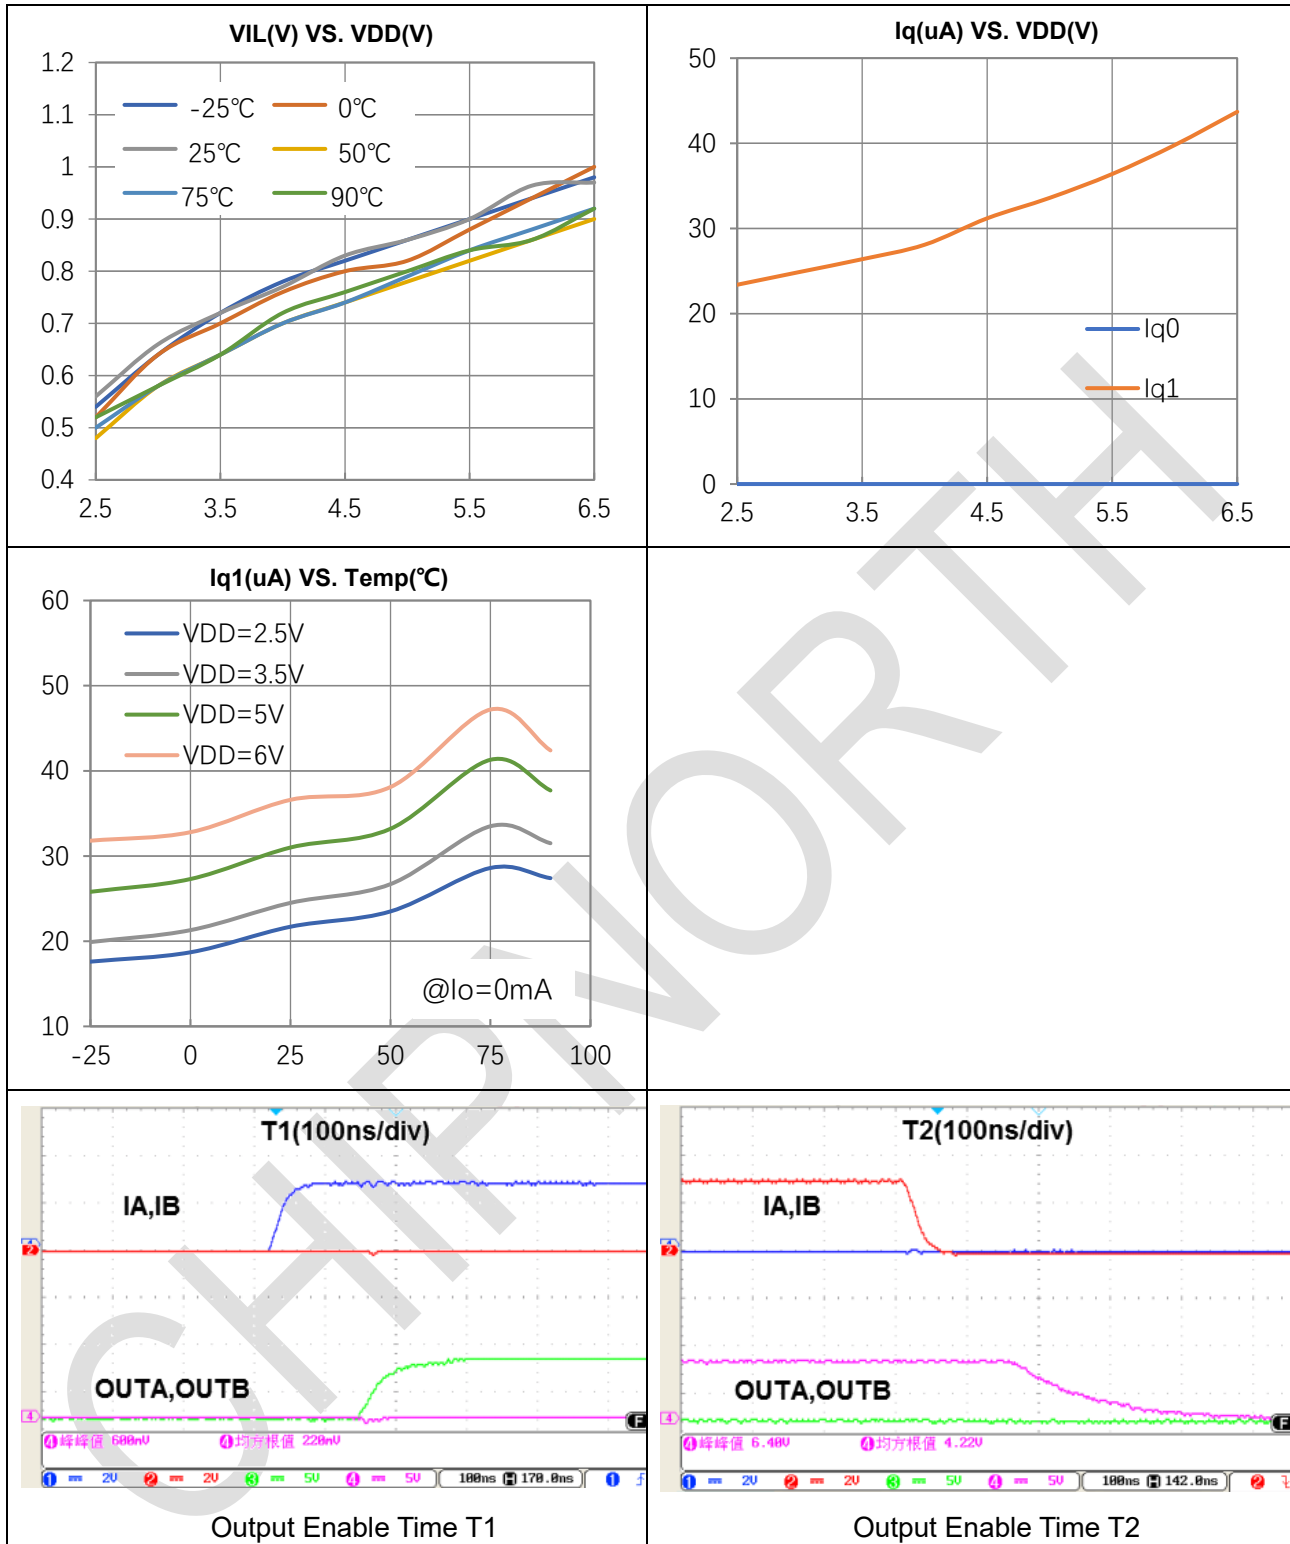

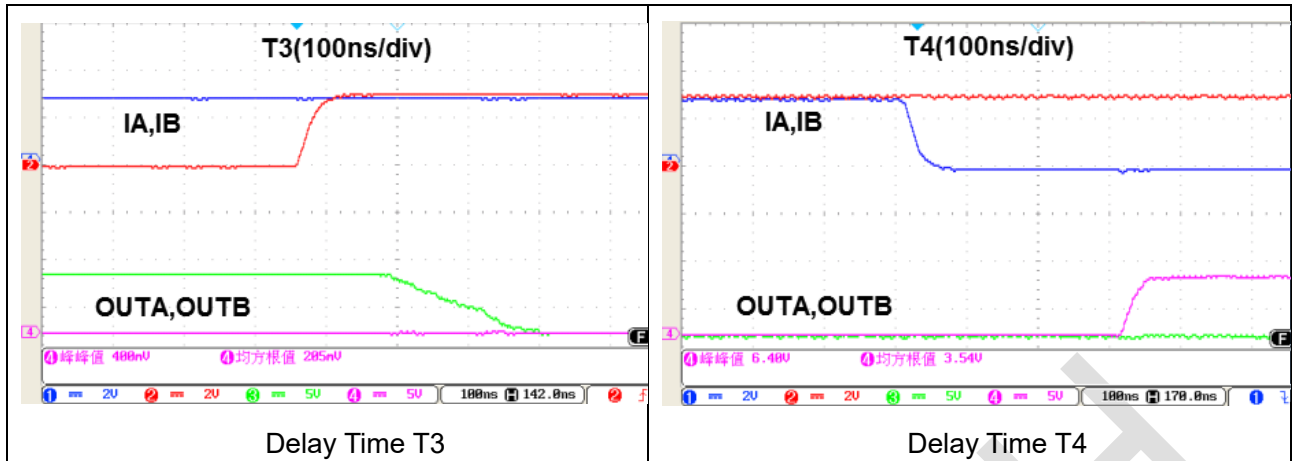

11 Detailed Description

11.1 Overview

The CN8001 is an H-bridge driver that can drive a DC motor or other devices such as solenoid valves. Outputs can be controlled via the CN8001's PWM interfaces (INA and INB). These devices integrate the necessary driver FETs and FET control circuits, thereby greatly reducing the number of components in a motor driver system. In addition, the CN8001 adds protection functions that go beyond conventional discrete implementations: thermal shutdown.

11.2 Control Mechanism

PWM (Pulse Width Modulation) technology achieves precise control of motor speed by adjusting the duty cycle of the pulse signal. This technique regulates the average value of the motor input voltage and thus controls the motor speed by changing the duty cycle of the PWM signal, i.e., the ratio of the pulse width to the pulse period. Specifically, the larger the duty cycle of the PWM signal, the higher the average value of the motor input voltage and the faster the motor speed; on the contrary, the smaller the duty cycle, the slower the motor speed.

11.3 Motor Control

The CN8001 is controlled via PWM input connectors (INA and INB connectors). Each output is controlled by the corresponding input pin.


INA	INB	OUTA	OUTB	Functions (DC motors)
L	L	Hi-Z	Hi-Z	Coast
L	H	L	H	Reverse
H	L	H	L	Forward
H	H	L	L	Brake

11.4 OTP

If the chip temperature exceeds 155°C, all field effect tubes in the H-bridge are disabled. Operation is automatically resumed when the chip temperature drops below 130°C.


12 Package Information

DFN2X2-8

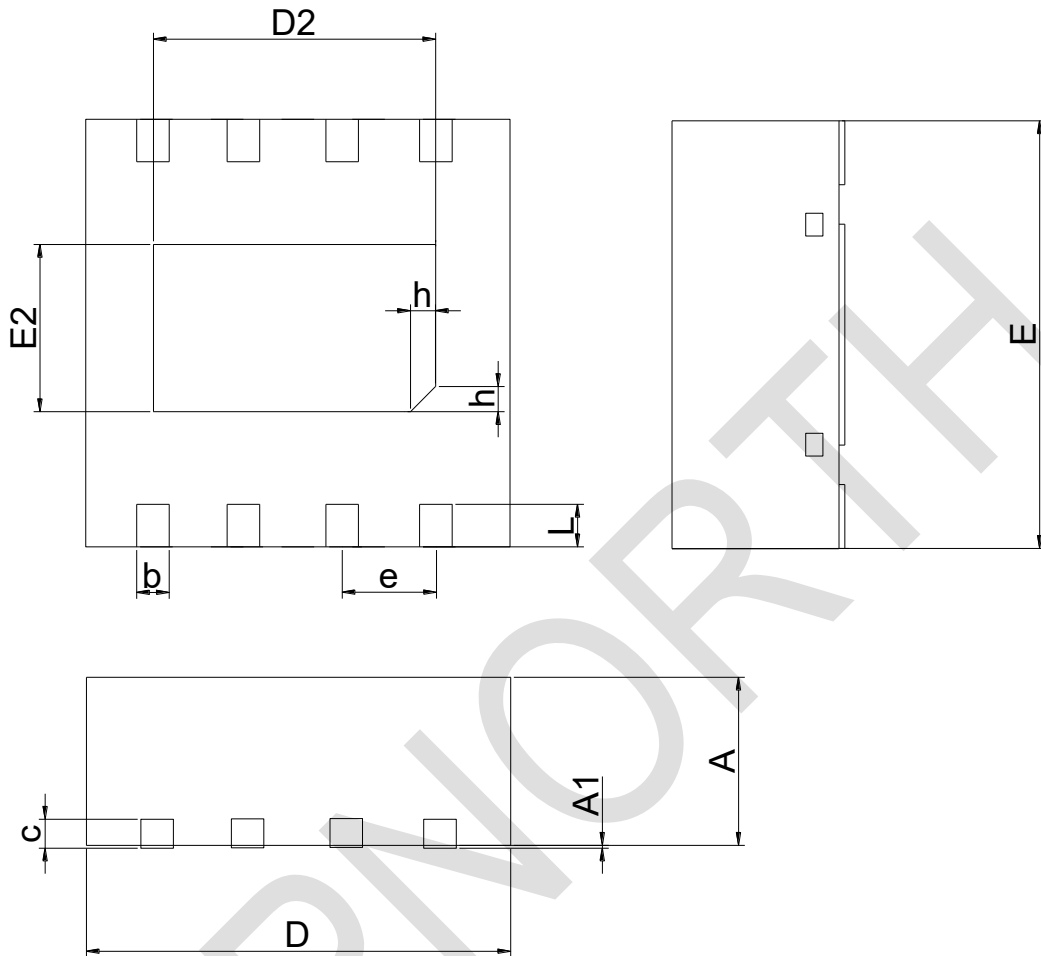


Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A	0.70	0.75	0.80
A1	0.00	0.002	0.005
b	0.18	0.29	0.30
c	0.20REF		
D	1.95	2.00	2.05
D2	1.50	1.55	1.60
e	0.50BSC		
E	1.95	2.00	2.05
E2	0.70	0.75	0.80
L	0.25	0.30	0.35
h	0.10	0.15	0.20
	L/F Carrier size (mm):1.00*1.80		

SOT23-6

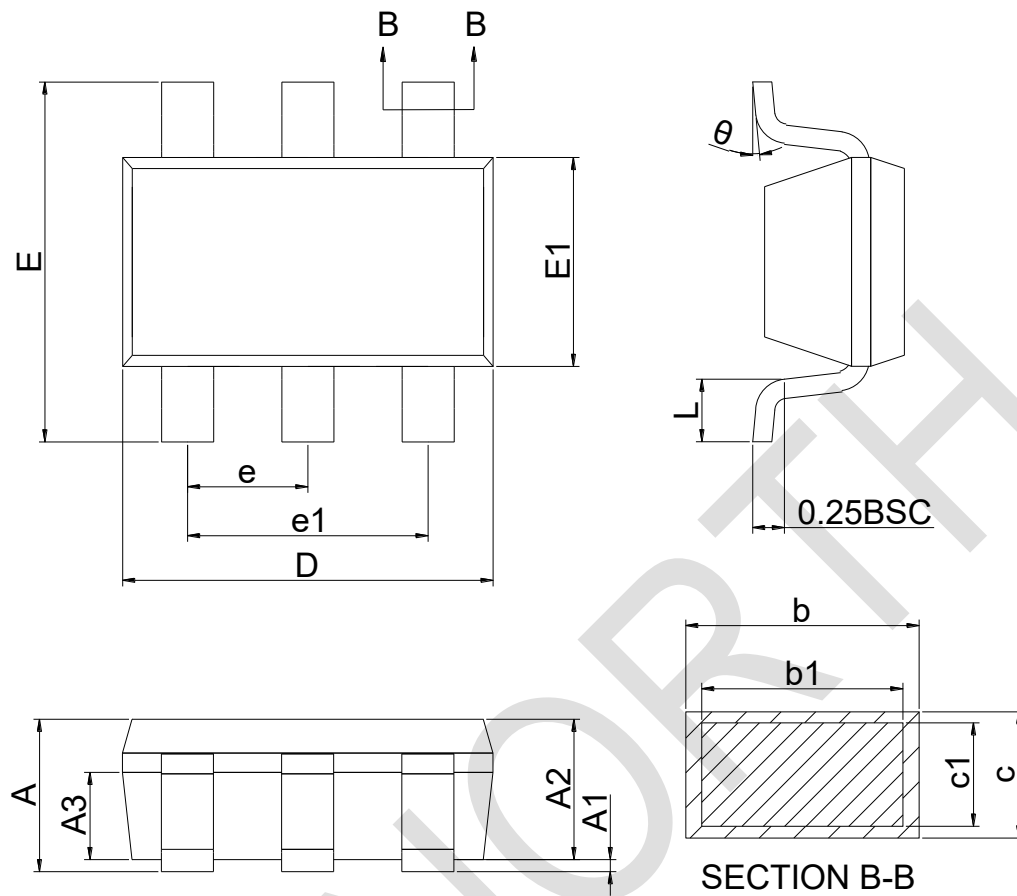

Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A			1.25
A1	0.04		0.10
A2	1.00	1.10	1.20
A3	0.55	0.65	0.75
b	0.38		0.48
b1	0.37	0.40	0.43
c	0.11		0.21
c1	0.10	0.13	0.16
D	2.72	2.92	3.12
E	2.60	2.80	3.00
E1	1.40	1.60	1.80
e	0.95BSC		
e1	1.90BSC		
L	0.30		0.60
θ	0°		8°

ESOP-8

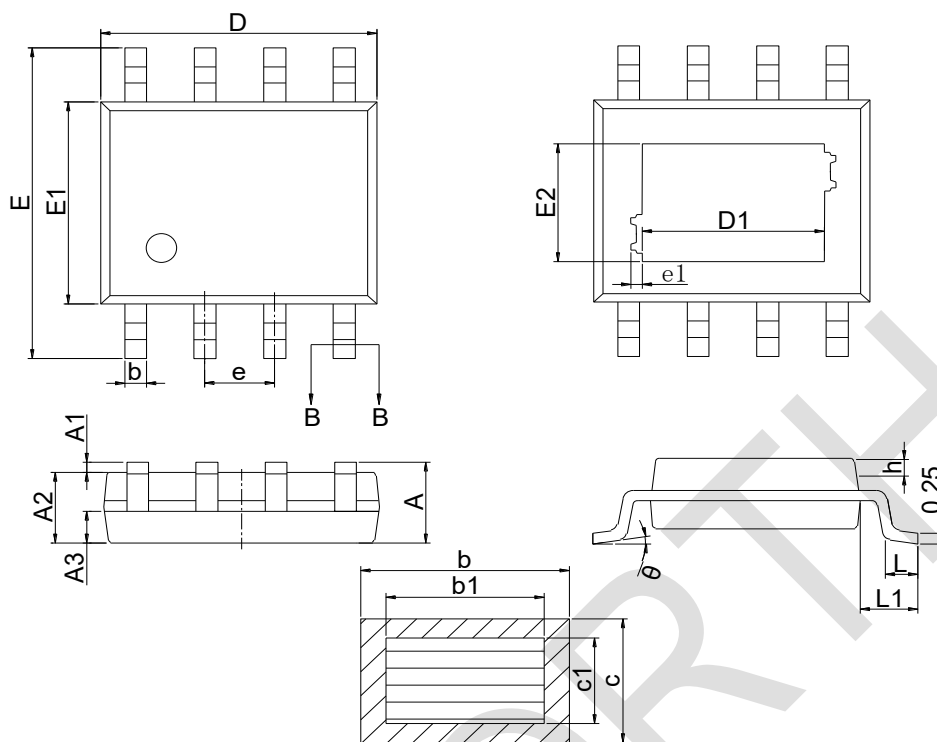

SECTION B-B

Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A			1.65
A1	0.05		0.15
A2	1.30	1.40	1.50
A3	0.60	0.65	0.70
b	0.39		0.47
b1	0.38	0.41	0.44
c	0.20		0.24
c1	0.19	0.20	0.21
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.05REF		
h	0.25		0.50
L	0.50	0.60	0.80
L1	1.05REF		
θ	0°		8°

Size(mm) L/F Size(nil)	D1	E2	e1
95*130	3.10REF	2.21REF	0.10REF

Note: SOP-8 has no heat dissipation pad, other dimensions are the same as ESOP-8

13 Important Statement

Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its subsidiaries reserve the right to make modifications, improvements, corrections, or other changes to this document and to any of the products described herein at any time without notice. Chipnorth Electronic Technology (Nanjing) Co., Ltd. disclaims any liability arising out of the use of this document or any of the products described herein; Chipnorth Electronic Technology (Nanjing) Co., Ltd. does not transfer any license to its patents or trademarks or other rights. Any customer or user using this document or any of the products described herein assumes all risk and agrees to hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and all companies whose products are displayed on Chipnorth Electronic Technology (Nanjing) Co., Ltd.

Chipnorth Electronic Technology (Nanjing) Co., Ltd. makes no warranty and assumes no responsibility for any products purchased through unauthorized sales channels. In the event that a customer purchases or uses a product from Chipnorth Electronic Technology (Nanjing) Co., Ltd. for any unintended or unauthorized use, the customer shall indemnify and hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its representatives from and against all claims, damages, and attorney's fees arising from any personal injury or death, directly or indirectly, arising out of or in connection with such purchase or use.