

Low Power Low Dropout Linear Regulator with Current Limiting

1 Description

The CN8803L is a high accuracy low dropout linear regulator with wide voltage input range, which provides 150mA output current. It features short circuit protection, over current protection and thermal shutdown.

CN8803L is available in SOT23-3/5, SOT89-3, DFN2X2-6 packages to meet the high density PCB layout and thermal performance requirements.

2 Features

- Low quiescent current: 5 μ A
- Output voltage range: 2.5V~5.6V (step 0.1V), 12V
- High accuracy: $\pm 2\%$
- Dropout voltage: 900mV @VOUT=3.3V / IOU=150mA
- Maximum output current: 150mA
- Input voltage range: maximum 36V
- Output short circuit protection
- Thermal shutdown
- Overcurrent protection

3 Applications

- Smart meters
- Switching power supply

4 Ordering information

Product Number	Package	Quantity/Tape
CN8803LXXXOGR	SOT89-3	1000/Tape
CN8803LXXXAOG	SOT89-3	1000/Tape
CN8803LXXXDSR	DFN2X2-6	3000/Tape
CN8803LXXXTCR	SOT23-5	3000/Tape
CN8803LXXXATCR	SOT23-5	3000/Tape
CN8803LXXXTGR	SOT23-3	3000/Tape

5 Marking


Product Number	Marking
CN8803LXXXOGR	03LXXX YYWW
CN8803LXXXAOG	03LXXXA YYWW
CN8803LXXXDSR	TBD
CN8803LXXXTCR	TBD
CN8803LXXXATCR	TBD
CN8803LXXXTGR	TBD

Note: XXX=Output voltage, YY/Y=Year, WW/W=Week.


Green (RoHS & HF): CHIPNORTH defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your CHIPNORTH representative directly.

Moisture sensitivity level(MSL):3

6 Pinout

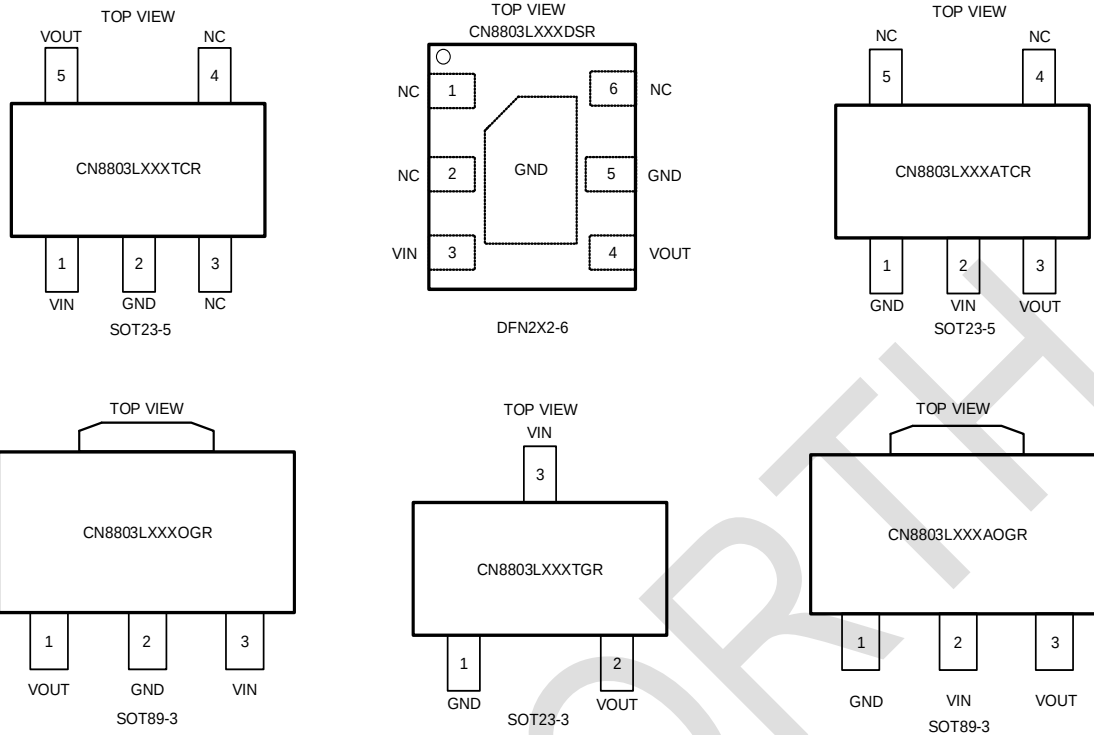


7 Typical Application

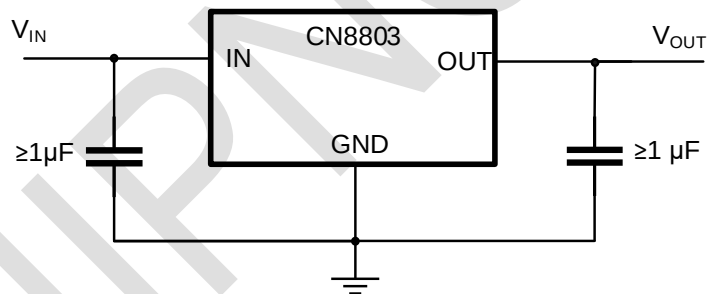

Note: General application circuits are recommended input capacitance $C_{IN} \geq 1\mu F$, near the chip input; output capacitance $C_{OUT} \geq 1\mu F$, near the chip output.

8 Block Diagram

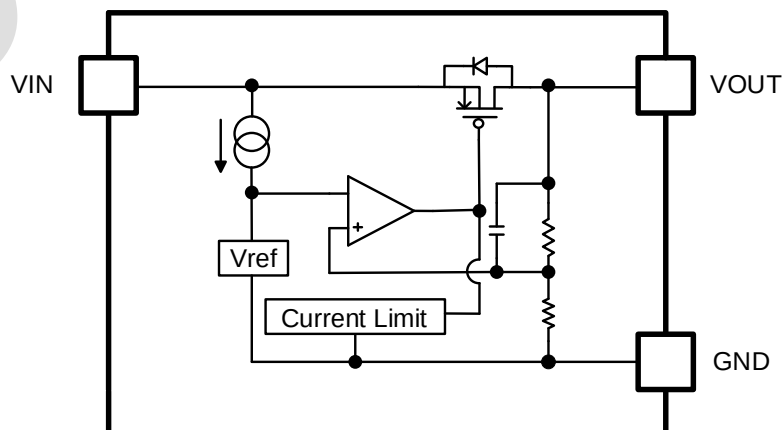

9 Pin Descriptions

Pin Name	Pin No.						Descriptions
	CN8803L XXXAAGR	CN8803L XXXOGR	CN8803L XXXDSR	CN8803L XXXTCR	CN8803L XXXATCR	CN8803L XXXTGR	
GND	1	2	5	2	1	1	Ground
VIN	2	3	3	1	2	3	Input
VOU	3	1	4	5	3	2	Output
NC			1、2、6	3、4	4、5		No connect

10 Specifications

10.1 Absolute Maximum Ratings

Parameter	Symbol	Value	Units
Input Voltage	V_{IN}	-0.3 ~ 40	V
Output Voltage	V_{OUT}	-0.3 ~ 20	V
Storage Temperature Range	T_{STG}	-55 ~ 150	°C
Soldering Temperature	T_{LEAD}	260 (Soldering 10s)	°C

10.2 ESD Ratings

Discharge mode	Standard	Value	Units
HBM	ANSI/ESDA/JEDEC JS-001-2024	±4000	V
CDM	ANSI/ESDA/JEDEC JS-002-2022	±2000	V

10.3 Recommended Operating Range

Parameter	Symbol	Min.	Max.	Units
Input Voltage	V_{IN}	$V_{OUT}+1$	36	V
Output Current	I_{OUT}		150	mA
Input Capacitor	C_{IN}	1		μF
Output Capacitor	C_{OUT}	1		μF
Operating Temperature	T_A	-40	105	°C

10.4 Thermal Information

Parameter	Package	Value	Unit
Junction to ambient thermal resistance($R_{\theta JA}$)	SOT23-3	220	°C/W
	SOT23-5	188	°C/W
	DFN2x2-6	140	°C/W
	SOT89-3	100	°C/W

10.5 Electrical Characteristics

Test conditions: $V_{IN}=V_{OUT}+2V$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input voltage range	V_{IN}	$I_{OUT}=10mA$	$V_{OUT}+1V$		36	V
Output voltage *1	V_{OUT}	$V_{IN}=V_{OUT}+2V$, $I_{OUT}=1mA$	V_{OUT} $\times 0.98$	V_{OUT}	V_{OUT} $\times 1.02$	V
Line regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{IN}=V_{SET}+2V \sim 36V$ $I_{OUT}=1mA @ V_{OUT}=3.3V$		0.01	0.026	%/V
Load regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+2V$ $I_{OUT}=1 \sim 150mA @ V_{OUT}=3.3V$		15	28	mV
Quiescent current	I_Q	$V_{IN}=7V$, $I_{OUT}=0mA$		5	7.3	μA
Dropout voltage*2	V_{DROP}	$I_{OUT}=150mA @ V_{OUT}=3.3V$		900	1250	mV
Max output current	I_{OUT_MAX}		150			mA
Current limit *3	I_{LIMIT}	$V_{IN}=V_{OUT}+2V$		270		mA
Thermal shutdown threshold	OTP			160		$^\circ C$
Thermal shutdown threshold hysteresis	OTP_Hys			30		$^\circ C$

Note*:


*1. $V_{OUT(S)}$: output voltage when $V_{IN} = V_{OUT} + 2V$, $I_{OUT} = 1mA$.

*2. $V_{DROP}=V_{IN}-(V_{OUT_REG} \times 0.95)$, V_{OUT_REG} is the output voltage when $V_{IN} = V_{OUT} + 2.0V$ and $I_{OUT} = 100mA$. V_{IN} is the input voltage, and when the input voltage is gradually reduced, the output voltage becomes 95% of V_{OUT_REG} .

*3. I_{LIMIT} : Output current when $V_{IN} = V_{OUT} + 2V$ and $V_{OUT} = 0.95 \times V_{OUT(S)}$.

10.6 Characteristics Curve

Test conditions: $V_{IN}=V_{OUT}+1V$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.

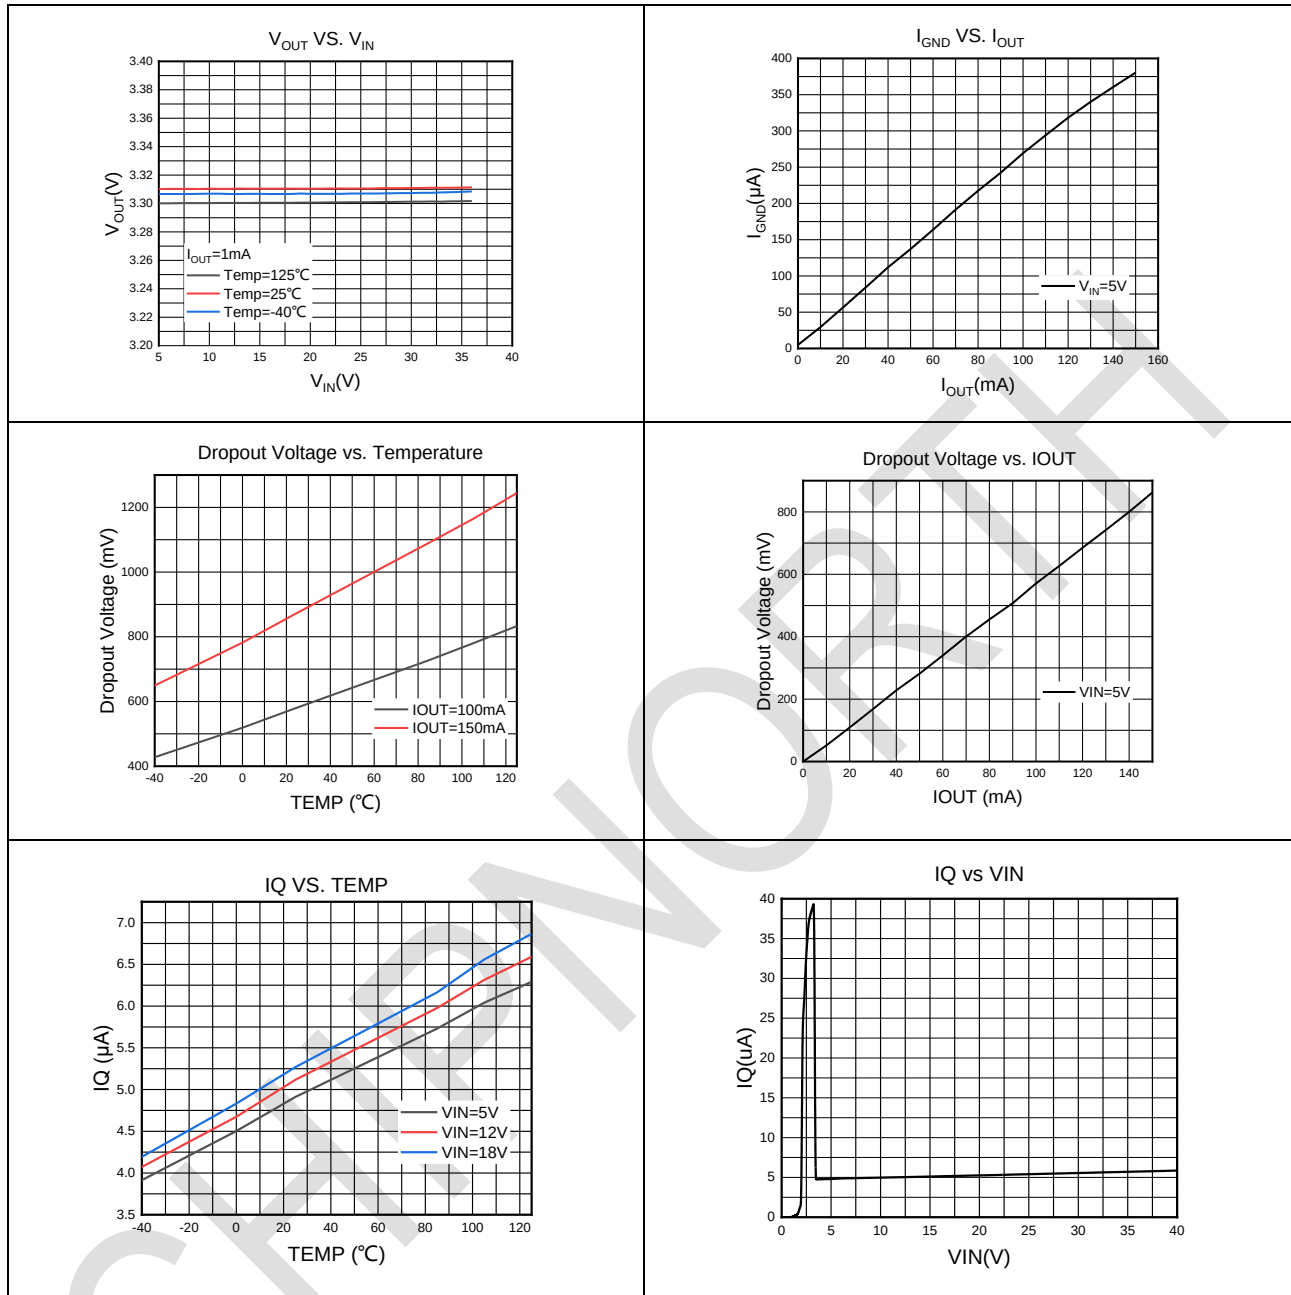

10.7 Operating waveforms

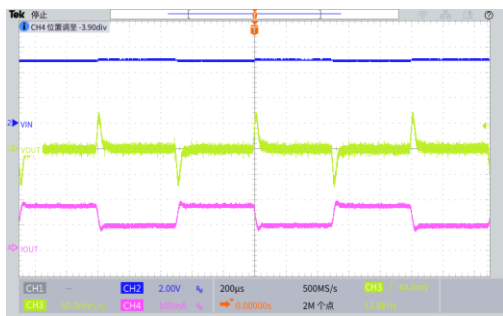


Figure1 Load Transient
(VIN=5V, IOUT=75mA-150mA-75mA)

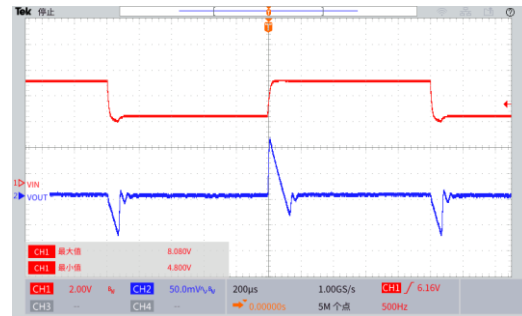


Figure 2 Line Transient
(VIN=from 8V to 5V to 8V IOUT=0mA)

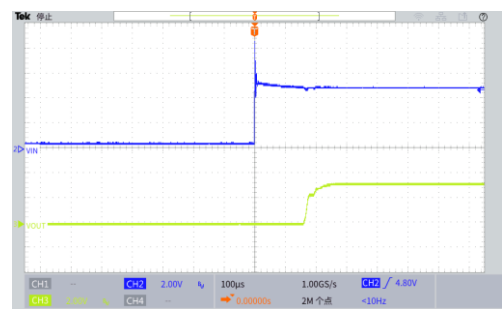


Figure 3 Power-up (fast)
(VIN=5V IOUT=0mA)


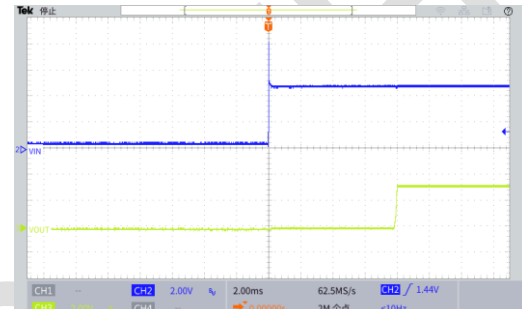


Figure 4 Power-up (fast)
(VIN=5V IOUT=150mA)


11 Package Information

SOT89-3

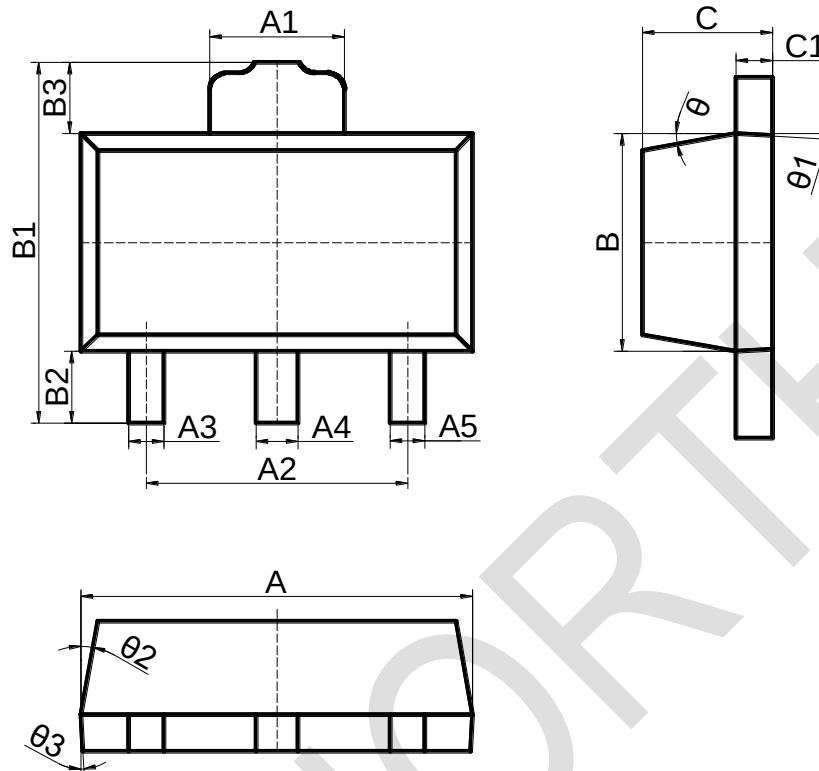


Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A	4.4	4.5	4.6
A1	1.4	1.6	1.8
A2	2.8	3.0	3.2
A4	0.37	0.47	0.57
A5	0.22	0.42	0.62
B	2.4	2.5	2.6
B1	-	-	4.25
B2	0.8	-	-
C	1.4	1.5	1.6
C1	0.3	0.4	0.5

DFN2X2-6

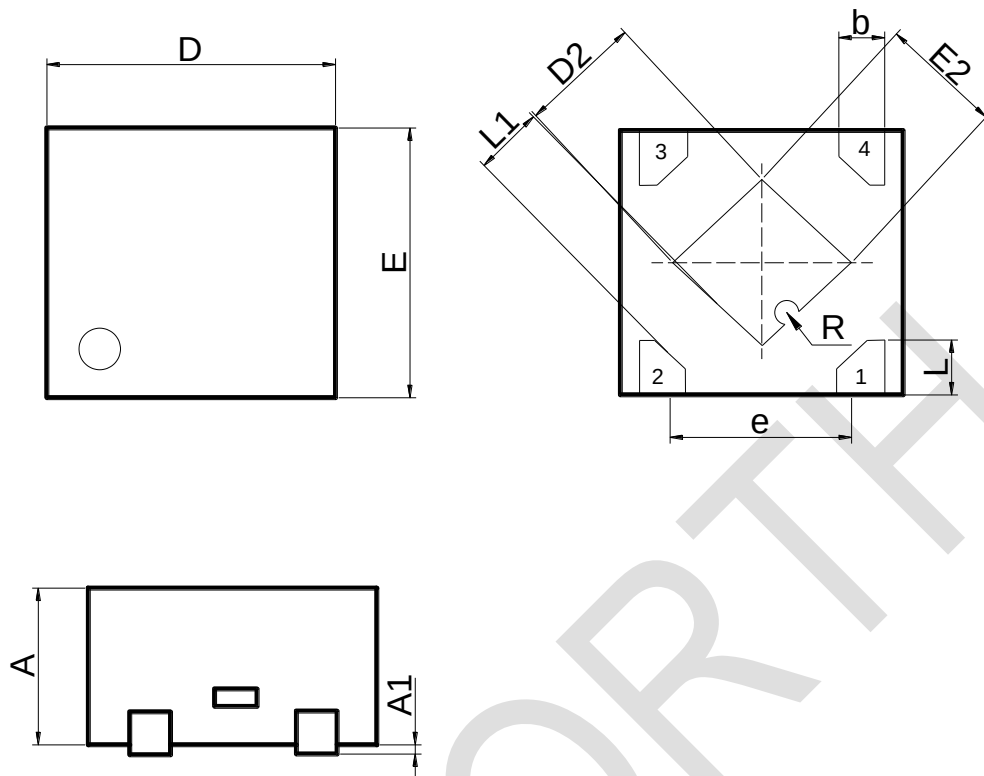


Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A	0.35	0.375	0.4
D	0.95	1.00	1.05
E	0.95	1.00	1.05
b	0.2	0.25	0.3
L	0.2	0.25	0.3
e	0.6	0.65	0.7
R		0.05	
L1		0.20	
D2	0.43	0.48	0.53
E2	0.43	0.48	0.53
A1	0	0.02	0.5

SOT23-5

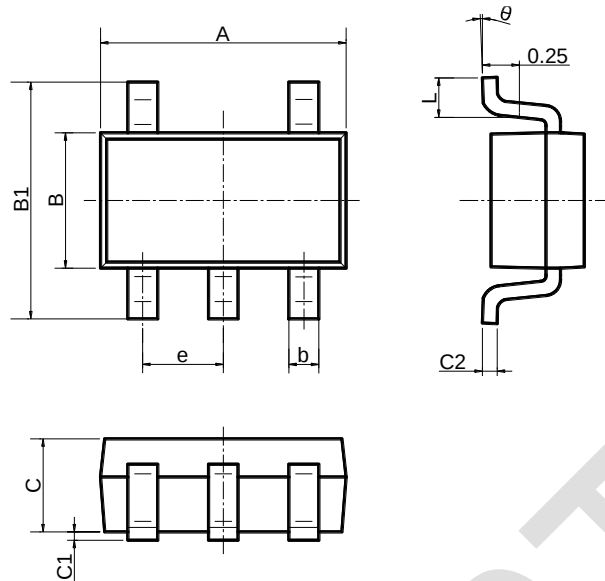

Dimension Symbol	Min (mm)	Nom (mm)	Dimension Symbol	Min (mm)	Nom (mm)
A	2.82	3.02	C	1.05	1.15
e	0.95(BSC)		C1	0.03	0.15
b	0.28	0.45	C2	0.12	0.23
B	1.50	1.70	L	0.35	0.55
B1	2.75	3.05	θ	0°	8°

SOT23-3

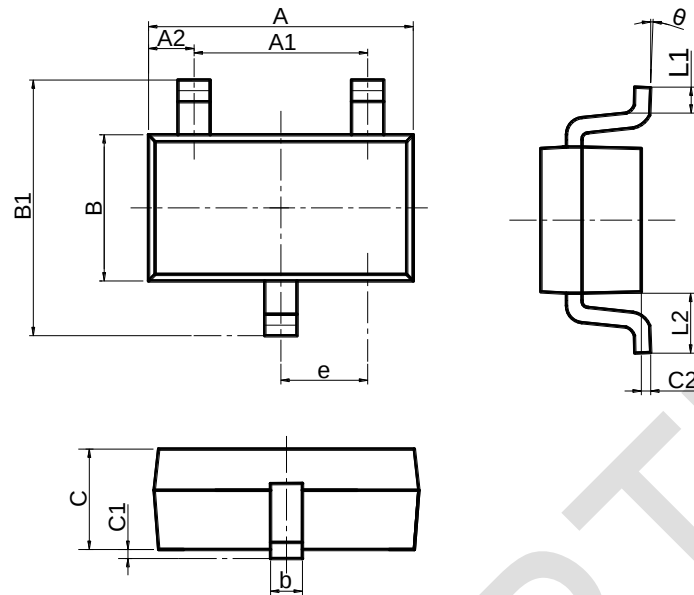

Dimension Symbol	Min (mm)	Nom (mm)	Max (mm)
A	2.70	2.90	3.10
A1	1.70	1.90	2.10
A2	-	-	0.6
e	0.85	0.95	1.05
b	0.30	0.40	0.50
B	1.50	1.60	1.80
B1	2.60	2.80	3.00
C	1.00	1.10	1.20
C1	-	-	0.10
C2	0.02	-	0.08
L1	0.20	-	0.55
L2	-	0.60	-
θ	0°	-	15°

12 Important Statement

Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its subsidiaries reserve the right to make modifications, improvements, corrections, or other changes to this document and to any of the products described herein at any time without notice. Chipnorth Electronic Technology (Nanjing) Co., Ltd. disclaims any liability arising out of the use of this document or any of the products described herein; Chipnorth Electronic Technology (Nanjing) Co., Ltd. does not transfer any license to its patents or trademarks or other rights. Any customer or user using this document or any of the products described herein assumes all risk and agrees to hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and all companies whose products are displayed on Chipnorth Electronic Technology (Nanjing) Co., Ltd.

Chipnorth Electronic Technology (Nanjing) Co., Ltd. makes no warranty and assumes no responsibility for any products purchased through unauthorized sales channels. In the event that a customer purchases or uses a product from Chipnorth Electronic Technology (Nanjing) Co., Ltd. for any unintended or unauthorized use, the customer shall indemnify and hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its representatives from and against all claims, damages, and attorney's fees arising from any personal injury or death, directly or indirectly, arising out of or in connection with such purchase or use.