

6 V to 28 V, Differential Broadband HPLC Line Driver with Common-mode Buffer

1 Description

The CN6212 is a differential line driver amplifier designed for power line communication (PLC) applications. It integrates two current-feedback amplifiers, delivering exceptionally low distortion to ensure transmitted signals strictly comply with power spectral mask requirements across PLC frequency bands. The device features a high 1A output current capability, enabling robust performance against significant variations in PLC channel impedance and maintaining signal transmission quality even under heavy loads. Its operating current is externally adjustable via a resistor and can be digitally scaled to 1/2 or 3/4 of the set value through a control pin, allowing software-based optimization of drive performance based on real-time channel conditions. The CN6212 operates over a wide voltage range of up to 28V.

The device incorporates on-chip protection circuits, including over-current protection and temperature compensation, ensuring stable and reliable operation under diverse conditions for superior performance in PLC systems.

The CN6212 is available in QFN 5x4-24L and QFN4x4-16L package.

2 Features

- Operating voltage: 6V to 28V
- Large signal bandwidth: > 20MHz
- 3rd harmonic suppression:
 - 40dBc @ 10M / 10Vpp / 50Ωload
 - 50dBc @ 5M / 10Vpp / 50Ωload
 - 60dBc @ 2M / 10Vpp / 50Ωload
 - 76dBc @ 500K / 10Vpp / 50Ωload
- 2nd harmonic suppression:
 - 55dBc @ 10M / 10Vpp / 50Ωload
 - 60dBc @ 5M / 10Vpp / 50Ωload
 - 70dBc @ 2M / 10Vpp / 50Ωload
 - 80dBc @ 500K / 10 Vpp / 50Ωload
- Operating current externally set, digitally controllable
- Slew rate: 500 V/μs
- Maximum differential output: 2x operating voltage -6V@50Ωload
- TTL / CMOS compatible
- Temperature range -40°C to +105°C

3 Applications

- Power line communication (PLC)

4 Ordering information

Product Number	Package	Quantity/Tape
CN6212	QFN5X4-24L	4000/Tape
CN6212A	QFN4X4-16L	5000/Tape

5 Marking


Product Number	Marking
CN6212	CN6212 YYWW
CN6212A	CN6212A YYWW

Note: YY=Year WW=Week.

Green (RoHS & HF): CHIPNORTH defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your CHIPNORTH representative directly.

Moisture sensitivity level(MSL):3

6 Pinout

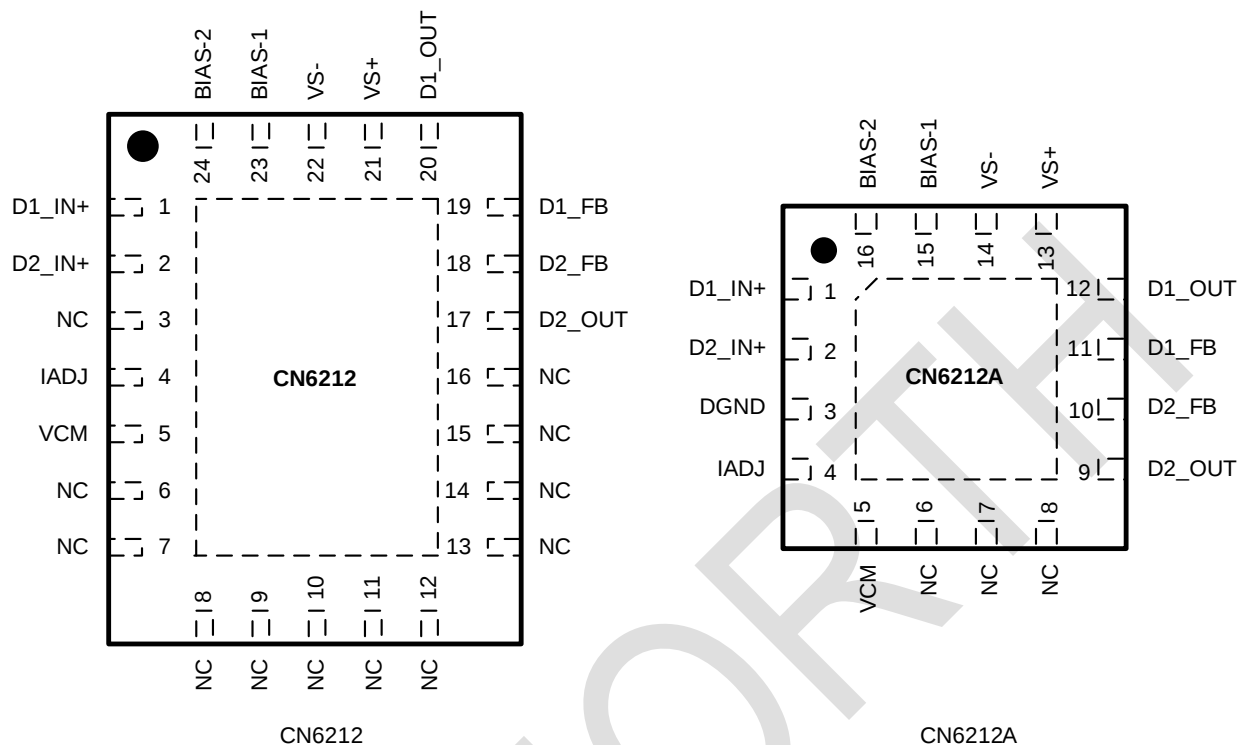

7 Typical Application

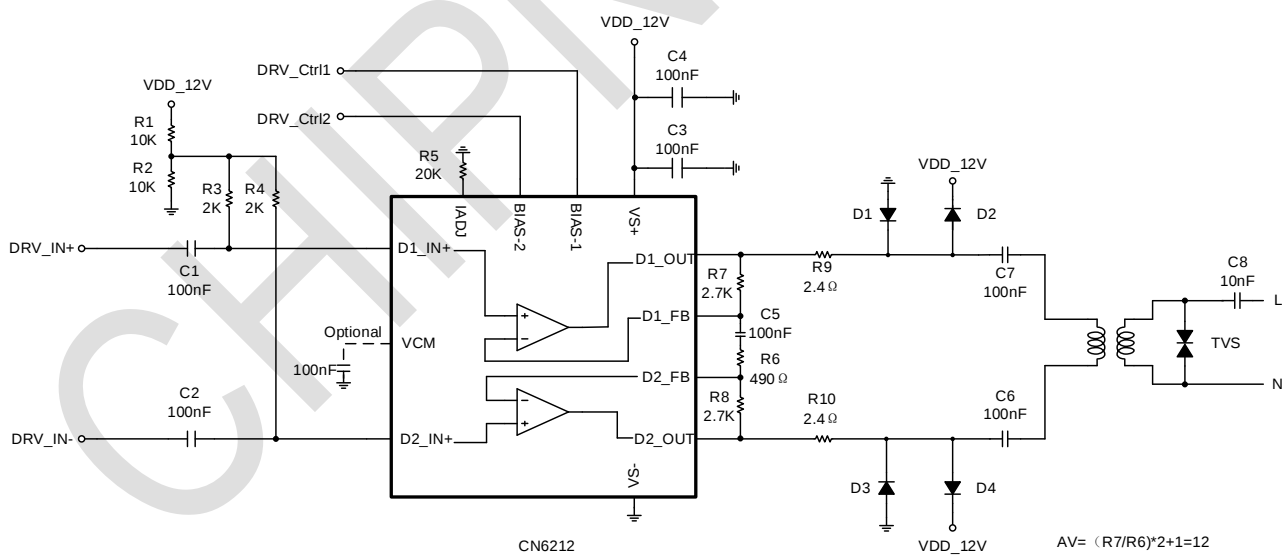


Figure 2 Typical Application

8 Pin Description

Pin No.		Pin Name	Descriptions
CN6212	CN6212A		
1	1	D1_IN+	Amplifier D1 noninverting input
2	2	D2_IN+	Amplifier D2 noninverting input
3、6~16	6~8	NC	No Connect
4	4	IADJ	Operating Current Set Point (External Resistor Connection)
5	5	VCM	Common-Mode Reference Voltage Output
17	9	D2_OUT	Amplifier D2 output
18	10	D2_FB	Amplifier D2 inverting input
19	11	D1_FB	Amplifier D1 inverting input
20	12	D1_OUT	Amplifier D1 output
21	13	VS+	Positive power-supply connection
22	14	VS-	Negative power-supply connection
23	15	BIAS-1	Power mode parallel control, LSB
24	16	BIAS-2	Power mode parallel control, MSB
/	3	DGND	GND
25	17	EP (1)	Connect to VS- on the printed circuit board (PCB) for best performance.

Note (1): EP must be connected to the exposed copper heat sink during PCB design and connected to the GND of the chip.

9 Specifications

9.1 Absolute Maximum Ratings

Symbol	Parameter	Value	Units
VS+	Maximum VDD terminal voltage	28	V
VBIAS	Logic pin BIAS1/BIAS2 input range	-0.3~10	V
T _J	Maximum Junction Temperature	150	°C
T _{STG}	Storage temperature	-55~150	°C

Note (1): If applied to extreme parameter conditions, the chip may be damaged.

9.2 ESD Ratings

Symbol	Standardize	Value	Units
HBM	ESDA/JEDEC JS-001-2017	±4000	V

9.3 Thermal Information

Symbol	Description	Value		Units
		CN6212	CN6212A	
θJA	Junction-to-ambient thermal resistance	43	48	°C /W
θJC(top)	Junction-to-case (top) thermal resistance	35	55	°C /W
θJB	Junction-to-board thermal resistance	21	22	°C /W


10 Electrical Characteristics


($V_{S+} = 12V$, $R_{IADJ} = 10K$, $T_A = +25^{\circ}C$, $A_V = 10$, differential load resistor R_L is added directly to the output via a $0.1\mu F$ capacitor, unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Voltage	V_{DD}		6	12	28	V
Shutdown current	I_{DD1}	BIAS-1 = BIAS-2 = 5V		60		μA
Quiescent current	I_{DD2}	BIAS-1 = BIAS-2 = 0V, $R_{IADJ} = 13K$		40		mA
	I_{DD3}	BIAS-1 = 5V, BIAS-2 = 0V, $R_{IADJ} = 13K$		22		mA
	I_{DD4}	BIAS-1 = 0V, BIAS-2 = 5V, $R_{IADJ} = 13K$		15		mA
Input Voltage Range	V_{IN}			1	3	V _{pp}
OutputOffsetVoltage	V_{OS}			1		mV
Input current at in-phase end	I_{INP}			0		μA
Input current at the inverting end	I_{INN}			20		μA
Input noise	en	2~12 MHz		11		nV/sqrtHz
Input High Level	V_{IH}		1.9			V
Input Low Level	V_{IL}				0.7	V
Logic built-in pull-up resistor	R_P	Built-in pull-up resistors on BIAS1 and BIAS2 ports		80		K Ω
Internal pull-up power supply	V_{DI}	BIAS1 = 0, BIAS2 dangling or BIAS2 = 0, BIAS1 dangling, measure dangling port voltage		5	7.5	V
Output Voltage Range	V_{OUT}	No load			18	V
Maximum Output Current	I_{OUT}	$V_{OUT} = 1 V_{PP}$, $R_L = 1\Omega$		1		A
Output Leakage Current	I_{LEAK}	BIAS1 = BIAS2 = 0, D1 OUT = D2 OUT = 6V		5		μA
Common mode level	V_{CM}			6		V
Bias voltage (electronics)	V_{IADJ}			1.6		V
Power Bandwidth	BW	$R_L = 100\Omega$, $A_V = 10$, $R_F = 2k$		30		MHz
2nd harmonic distortion	2HD	$F_C = 500KHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		80		dBc
		$F_C = 2MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		71		dBc
		$F_C = 5MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		63		dBc
		$F_C = 10MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		57		dBc
3rd harmonic distortion	3HD	$F_C = 500KHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		80		dBc
		$F_C = 2MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		61		dBc
		$F_C = 5MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		50		dBc
		$F_C = 10MHz$, $V_{OUT} = 10V_{pp-diff}$, $R_L = 50\Omega$		41		dBc
Slew rate	SR	$V_{OUT} = 16V_{PP}$		500		V/ μs


11 Typical Parameter

($V_{S+} = 12V$, $R_{IADJ} = 10K$, $T_A = +25^{\circ}C$, $A_V = 10$, differential load resistor R_L is added directly to the output via a $0.1\mu F$ capacitor, and the test circuit operating conditions are based on typical application conditions, unless otherwise noted)

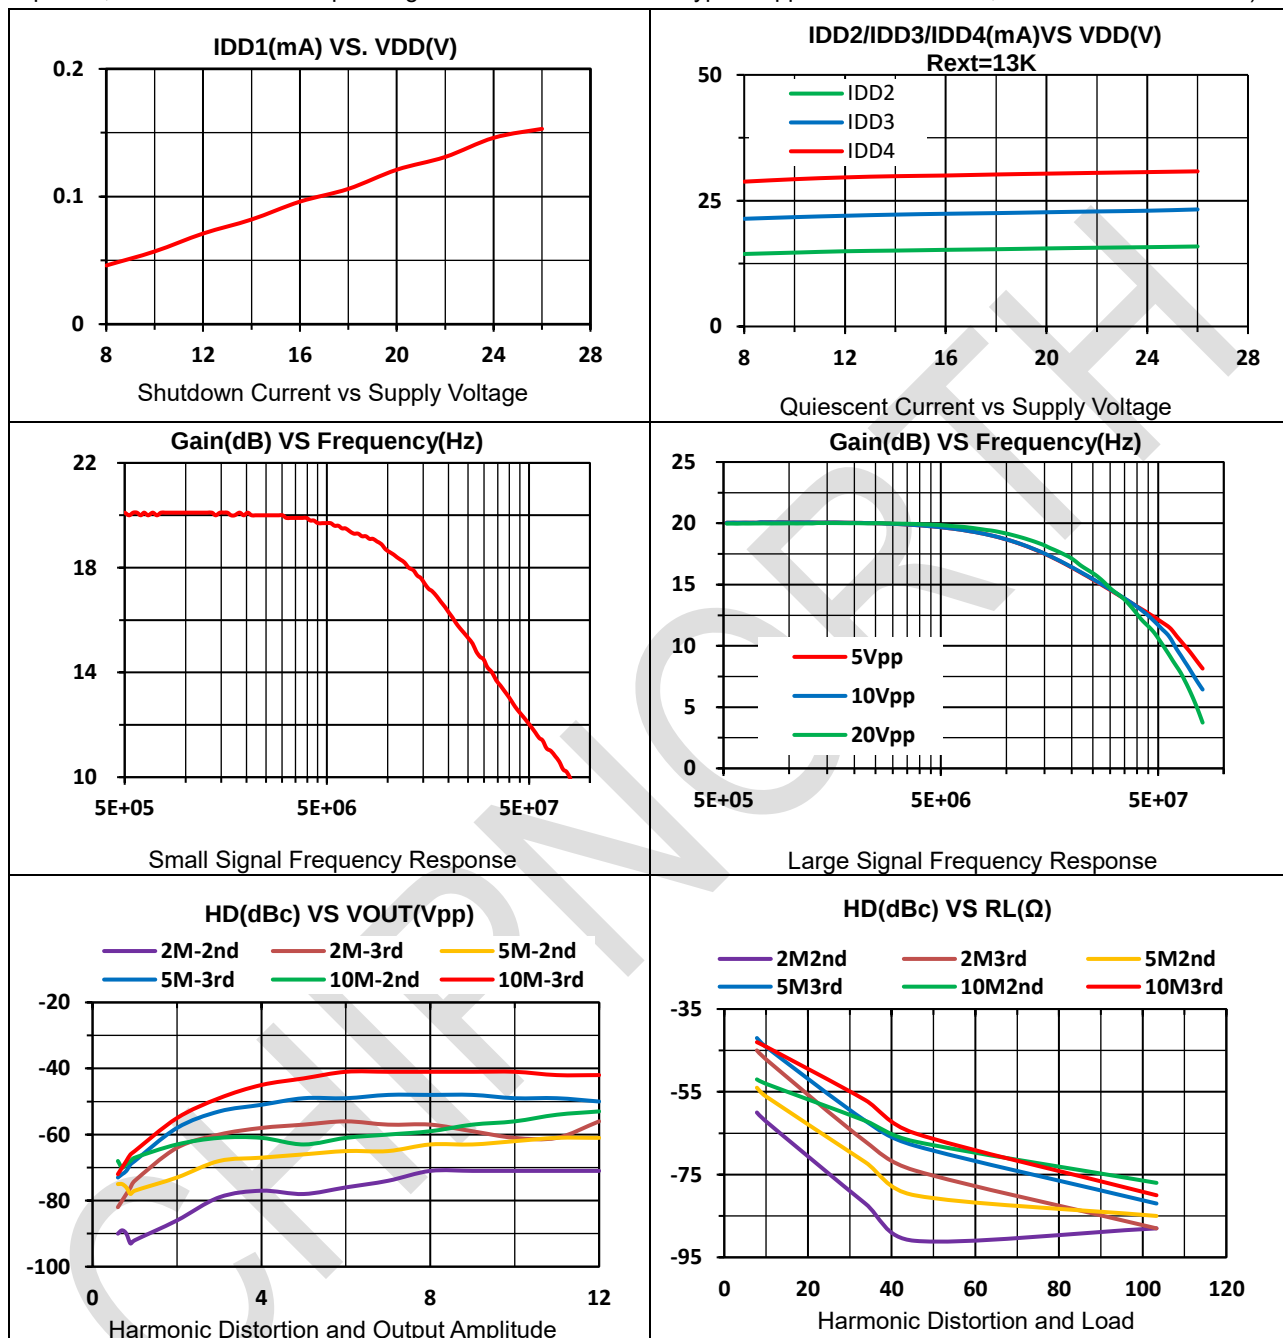

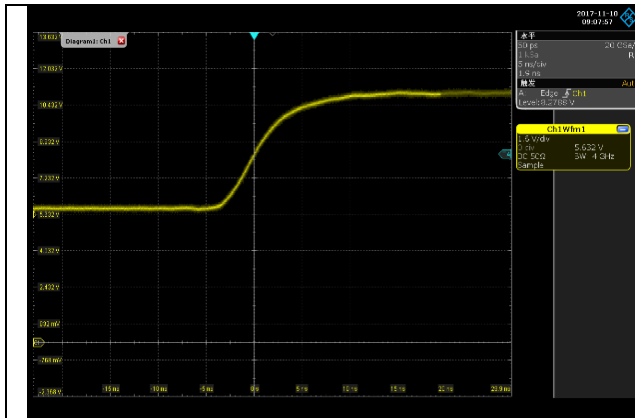

Step Response Waveform

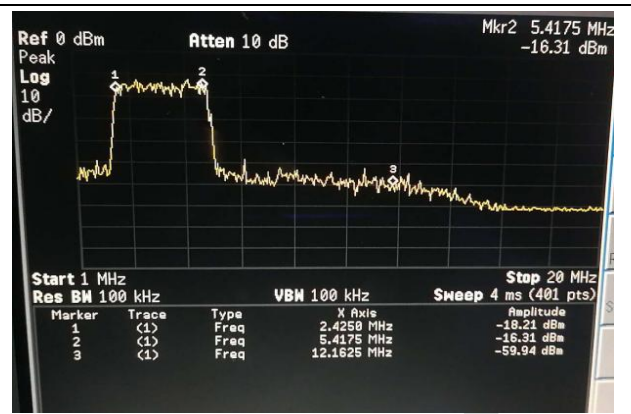


2.4MHz-5.6MHz OFDM signal transmission spectrum


12 Package Outside Dimensions

QFN 5X4 - 24L


Symbol	MILLIMETER			Symbol	MILLIMETER		
	Min	Typ	Max		Min	Typ	Max
A	0.7	0.75	0.8	D1	3.55	3.65	3.75
A1	0.00	-	0.05	E1	2.55	2.65	2.75
A2	0.203REF			e	0.50TYP		
b	0.225	0.250	0.275	K	0.275TYP		
D	4.90	5.00	5.10	L	0.30	0.40	0.50
E	3.90	4.00	4.10				

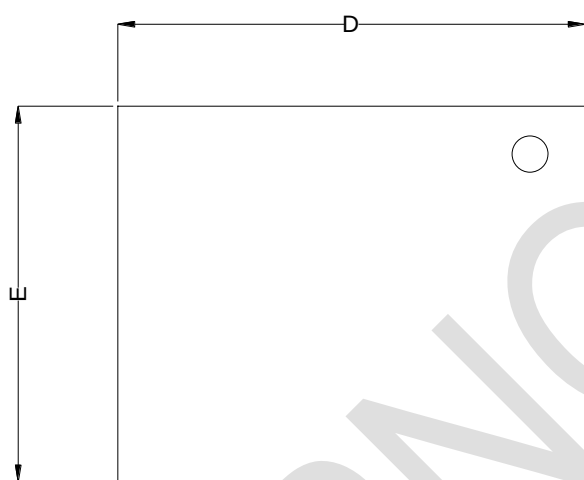

Top View

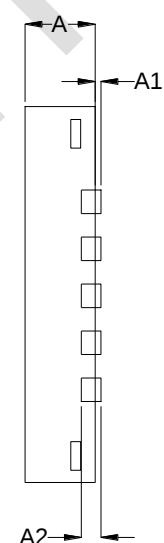


Side View

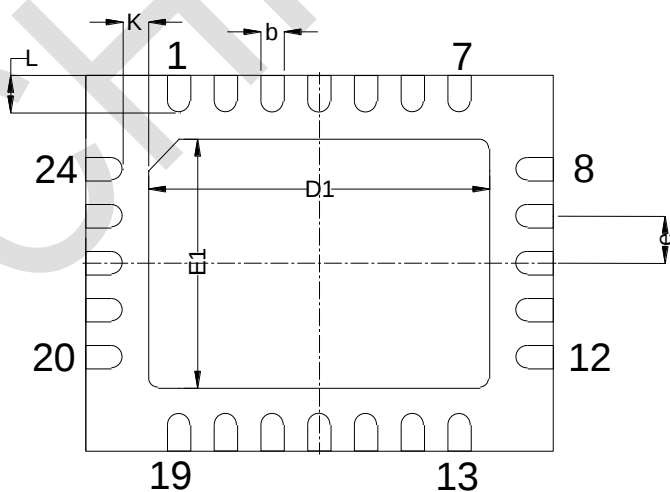


Bottom View

QFN 4X4 - 16L


Symbol	MILLIMETER			Symbol	MILLIMETER		
	Min	Typ	Max		Min	Typ	Max
A	0.70	0.75	0.80	e	0.650BSC		
	0.80	0.85	0.90	Ne	1.95BSC		
A1	-	0.02	0.05	Nd	1.95BSC		
b	0.25	0.30	0.35	E	3.90	4.00	4.10
c	0.18	0.20	0.25	E2	2.10	2.20	2.30
D	3.90	4.00	4.10	L	0.45	0.55	0.65
D2	2.10	2.20	2.30	h	0.30	0.35	0.40

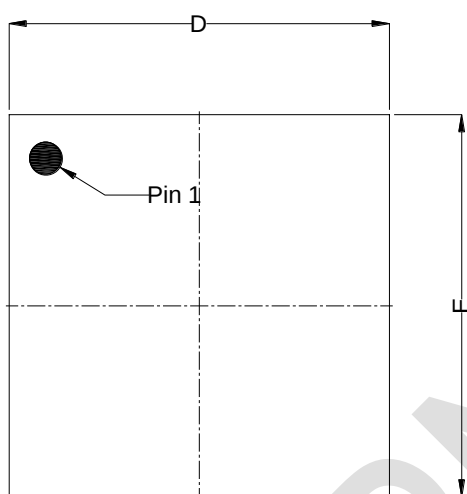

Top View

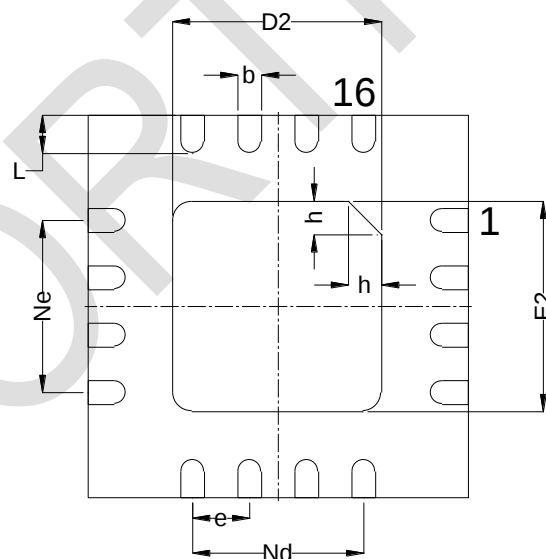

Bottom View



Side View

13 Important Statement

Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its subsidiaries reserve the right to make modifications, improvements, corrections, or other changes to this document and to any of the products described herein at any time without notice. Chipnorth Electronic Technology (Nanjing) Co., Ltd. disclaims any liability arising out of the use of this document or any of the products described herein; Chipnorth Electronic Technology (Nanjing) Co., Ltd. does not transfer any license to its patents or trademarks or other rights. Any customer or user using this document or any of the products described herein assumes all risk and agrees to hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and all companies whose products are displayed on Chipnorth Electronic Technology (Nanjing) Co., Ltd.

Chipnorth Electronic Technology (Nanjing) Co., Ltd. makes no warranty and assumes no responsibility for any products purchased through unauthorized sales channels. In the event that a customer purchases or uses a product from Chipnorth Electronic Technology (Nanjing) Co., Ltd. for any unintended or unauthorized use, the customer shall indemnify and hold harmless Chipnorth Electronic Technology (Nanjing) Co., Ltd. and its representatives from and against all claims, damages, and attorney's fees arising from any personal injury or death, directly or indirectly, arising out of or in connection with such purchase or use.